






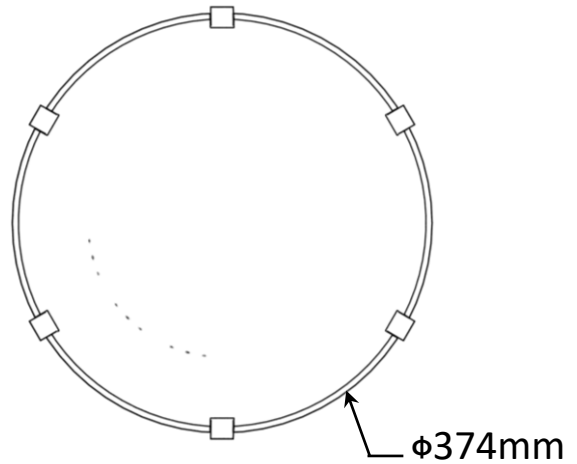
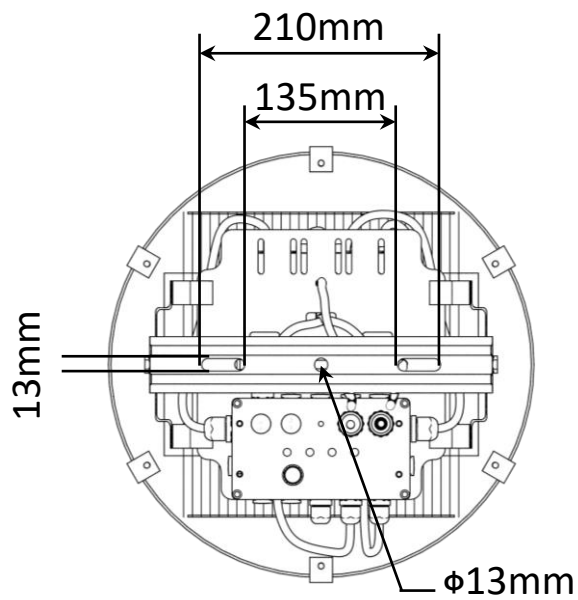
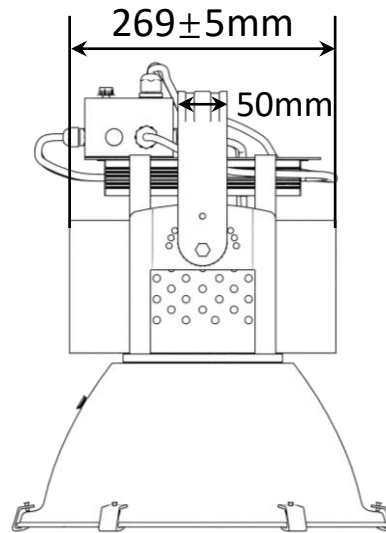
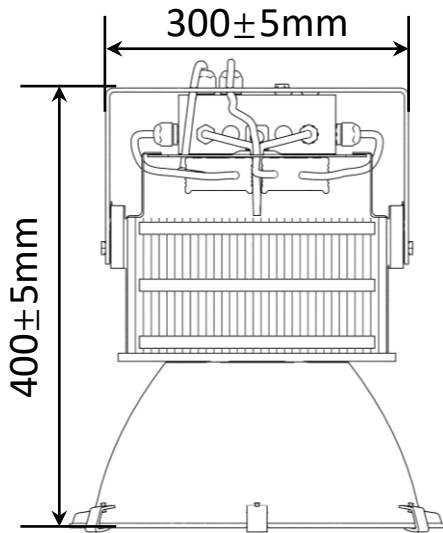


Maxspect Commercial LED Light Specification






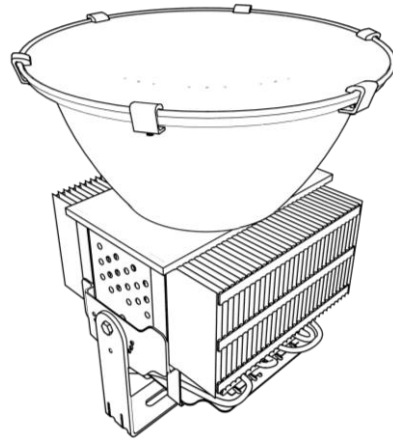


System	Power	Color Temp.	Reflector	Control	PAR Value	Rendered Image
Commercial LED Lighting System with single reflector	150w	7000K 10000K 14000K RGB Full Spectrum	25° 45° 60° 100°	Channel: 1 Control Option: Onboard WiFi DMX 0-10V	 Measure Distance: 2m Reflector Angle: 60° Center: 65 50cm from center: 60 100cm from center: 30	
Commercial LED Lighting System with single reflector	300w	7000K 10000K 14000K RGB Full Spectrum	25° 45° 60° 100°	Channel: 2-4 Control Option: Onboard WiFi DMX 0-10V	 Measure Distance: 2m Reflector Angle: 60° Center: 100 40cm from center: 95 75cm from center: 50	
Commercial LED Lighting System with single reflector	500w	7000K 10000K 14000K RGB Full Spectrum	25° 45° 60° 100°	Channel: 2-4 Control Option: Onboard WiFi DMX 0-10V	 Measure Distance: 4.5m Reflector Angle: 60° Center: 105 40cm from center: 100 75cm from center: 71	
Commercial LED Lighting System with multiple reflectors	600w	7000K 10000K 14000K RGB Full Spectrum	10° 15° 25° 30° 45° 60° 90°	Channel: 2-4 Control Option: Onboard WiFi DMX 0-10V	 Measure Distance: 4.5m Reflector Angle: 25° Center: 226 40cm from center: 177 75cm from center: 110	
Commercial LED Lighting System with multiple reflectors	1000w	7000K 10000K 14000K RGB Full Spectrum	10° 15° 25° 30° 45° 60° 90°	Channel: 2-4 Control Option: Onboard WiFi DMX 0-10V	 Measure Distance: 4.5m Reflector Angle: 25° Center: 288 40cm from center: 225 75cm from center: 157	







F150W

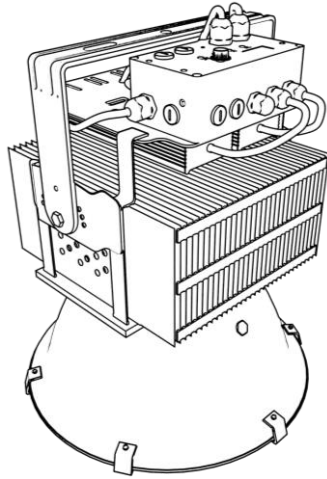







F300W

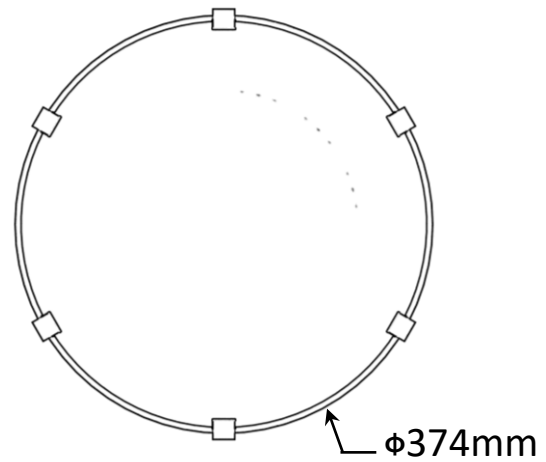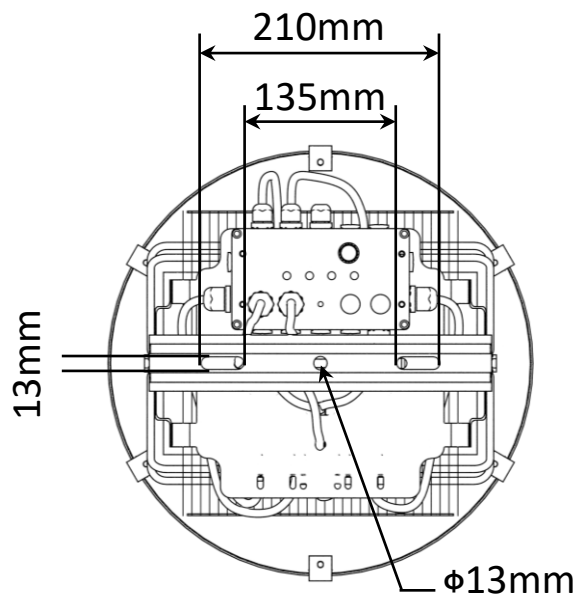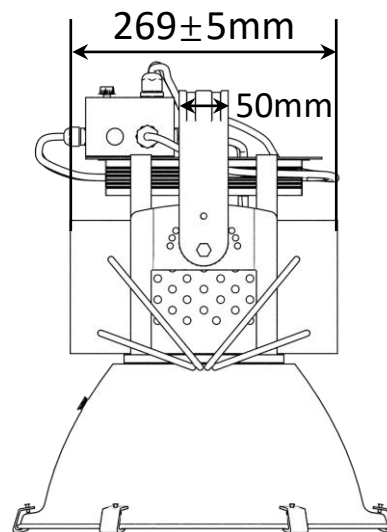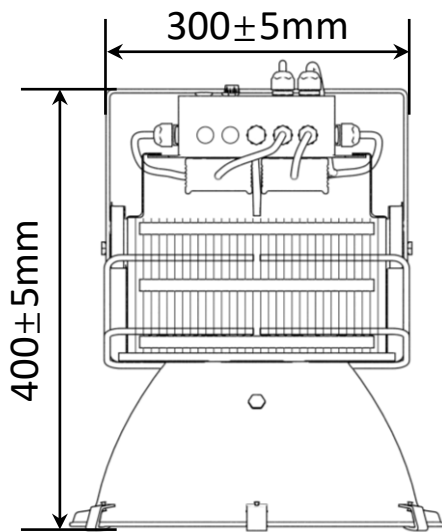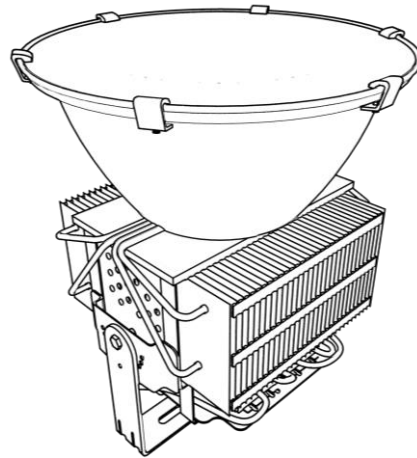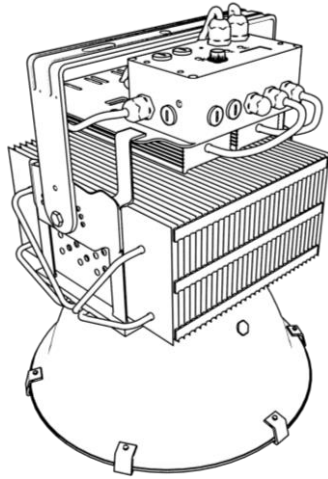

F500W

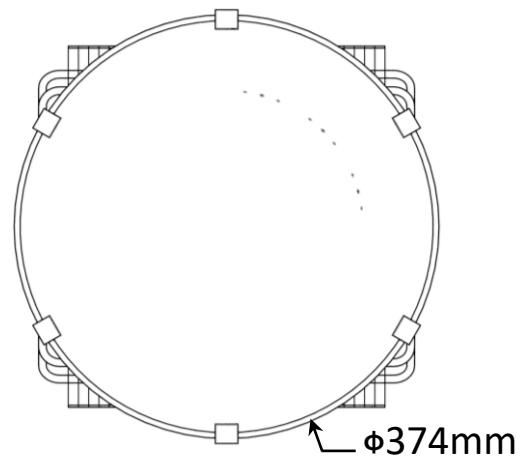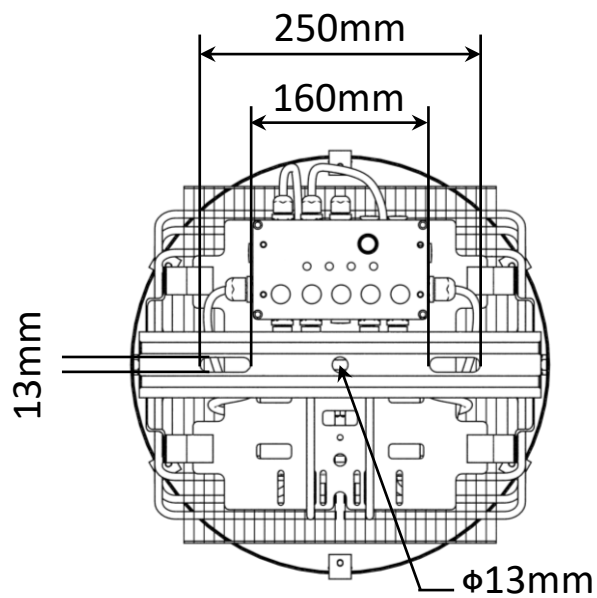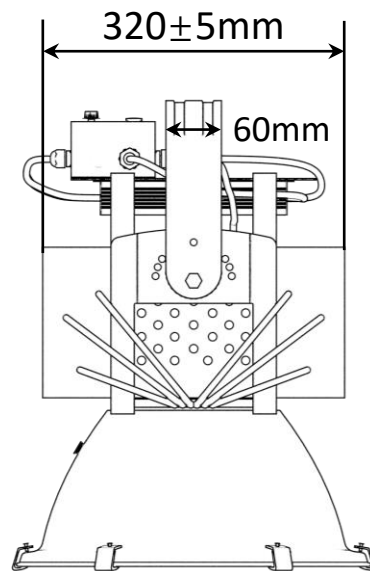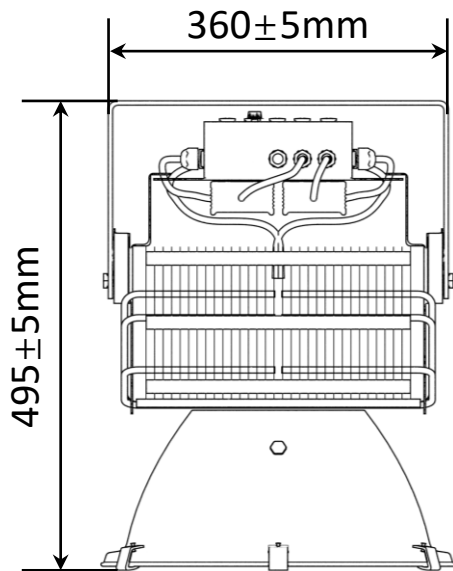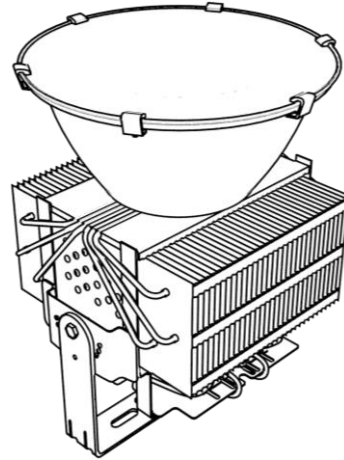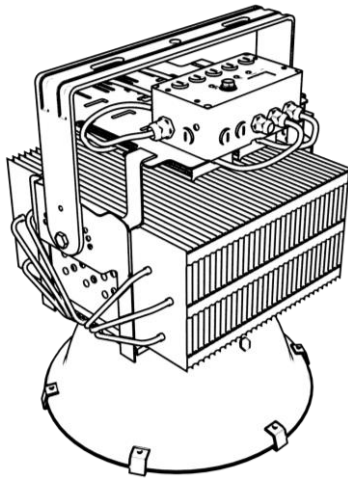

F600W

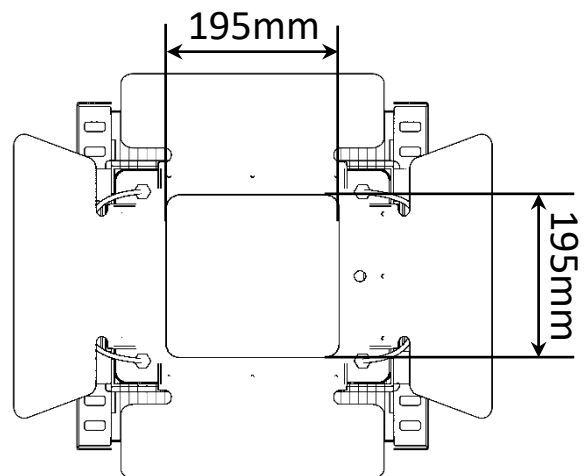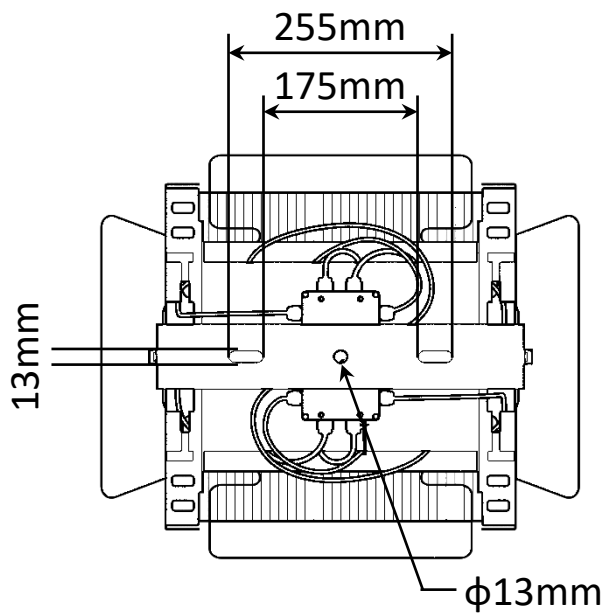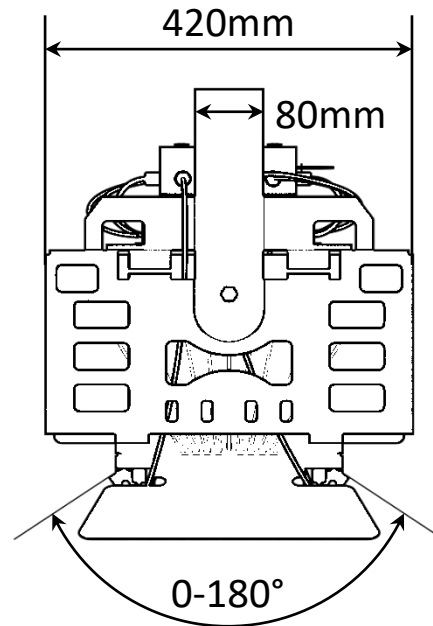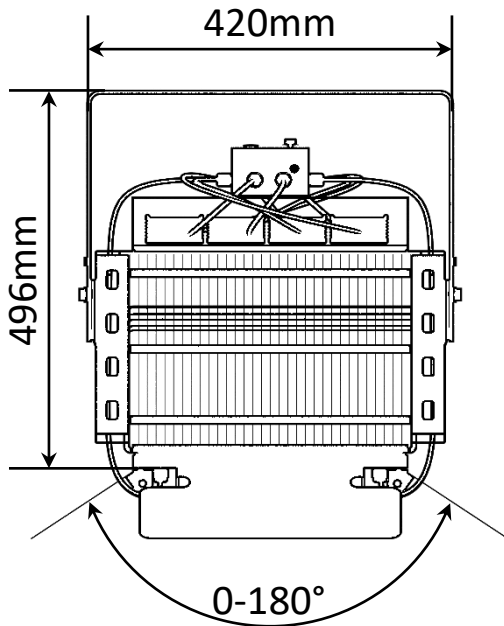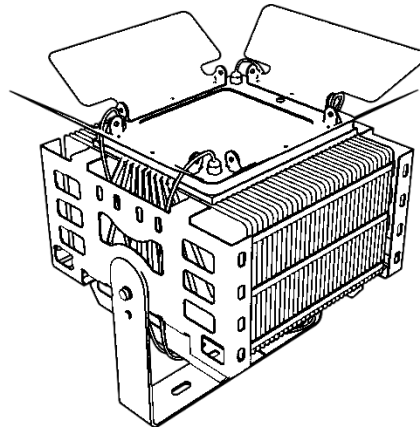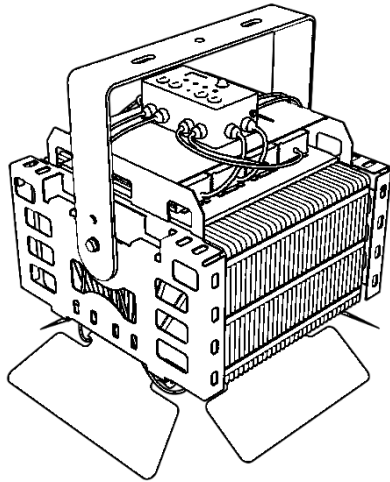

F1000W

